


AC08038B23HL001

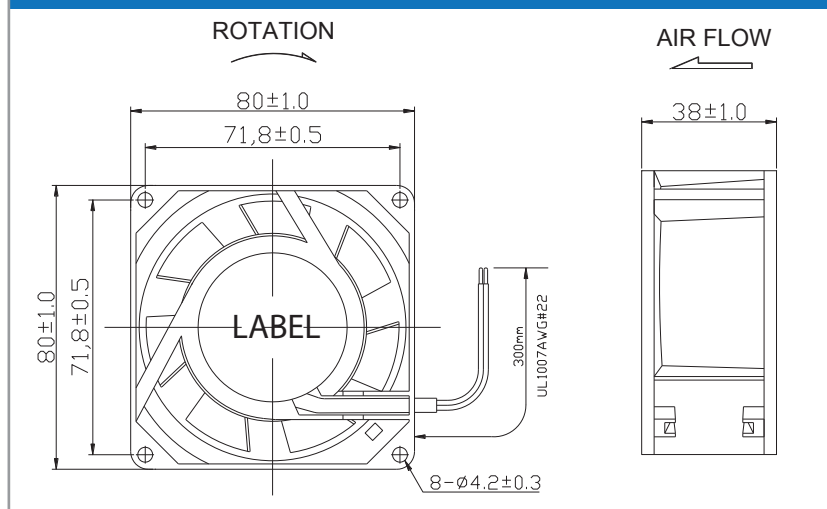

Dimensions: 80x80x38mm
Voltage: 230Va.c.
Starting Voltage: 165 Va.c.

Motor Type	Shaded Pole Induction Motor		Capacitor Run Induction Motor
Rotor Type	Internal Rotor Motor		External Rotor Motor
Fan Case	Aluminium Alloy		Black Painted
Fan Blade	Thermoplastic PBT		5 Blades
Direction of Rotation	Clockwise		
Frequency	50(Hz)	60(Hz)	a. Rated Voltage b. 25 c. 65% RH d. Measured after 5 mins e. PQ Measurement Apparatus : (LW9266 -SR) f. Standard : AMCA
Speed	2450(rpm)	2950(rpm)	
Current	0.09 (A)	0.07(A)	
Input Power	17.0 (W)	15.0 (W)	
Locked Rotor Current	0.11 (A) MAX	0.09(A) MAX	
Max. Air Flow	20.56 (CFM)	25.61 (CFM)	
Max. Static Pressure	2.38 (Inch -H ₂ O)	3.58 (Inch -H ₂ O)	
Noise Level	39(dB)	41 (dB)	
Insulation resistance	500V 500Megohms minimum at DC500V		
Dielectric Withstand Voltage	1800VAC for 3 seconds		
Insulation Class	E (Class E)		
Bearing	Dual Ball Bearing	Sleeve Bearing	
Life Expectation	50000 (50000h at 40, RH 60%)		
Lead Wire	Wire		
Weight	550(g)		
Safety Certificate	CE UL		