


EC ATEX IP68 Axial Compact Fan Technical Information

HEC1238_A

120x120x38mm

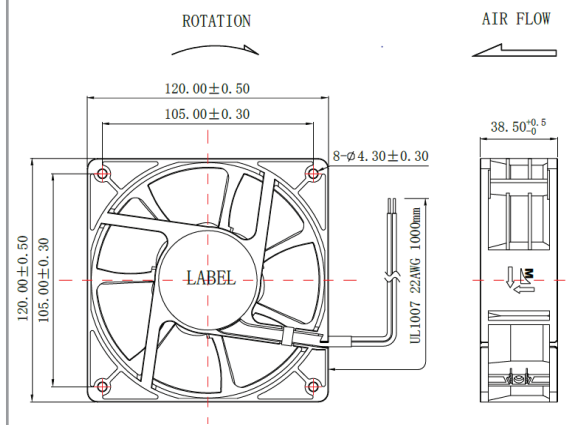

Casing Material:

Impeller Material:

Motor Protection:

Rotation:

Storage Temperature:

Operating Temperature:

Lifetime (L10 at 40°C):

Electrical Connection:

Bearings:

Safety Approvals:

Thermoplastic UL 94V-0/Black

Thermoplastic UL 94V-0/Black

Locked Rotor Protected

Clockwise (from label side)

-40°C to +70°C

-30°C to +70°C

70,000hrs


2x Lead Wires

2x Ball Bearings

CE, ATEX



II 3G Ex ec IIC Gc

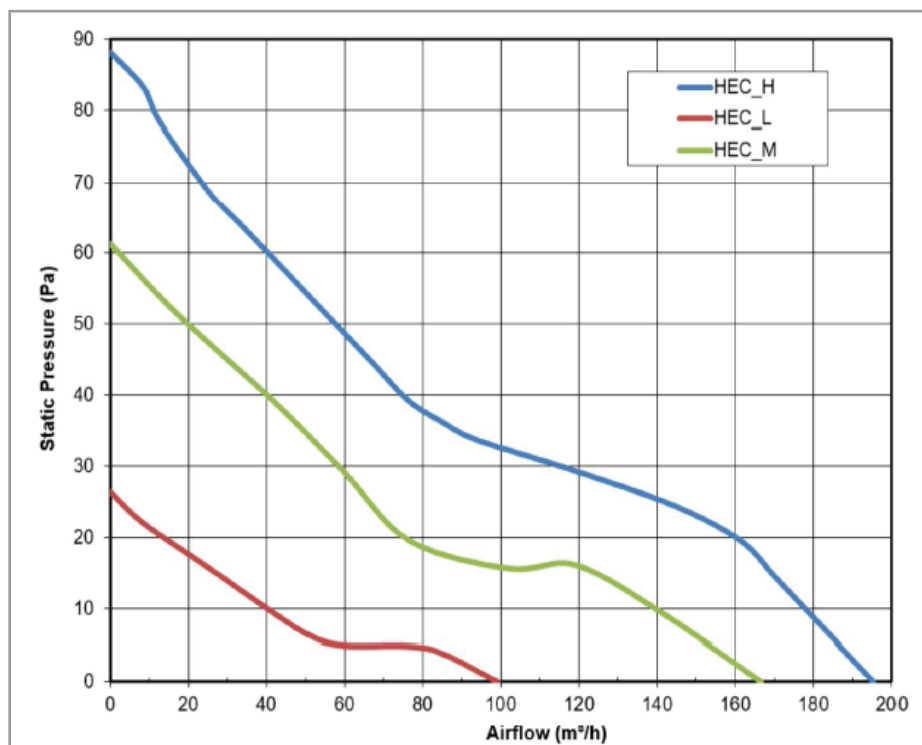

INGRESS PROTECTION 68



ATEX CERTIFICATED



ELECTRONICALLY
COMMUTATED

Model	Voltage (V)	Voltage Range (V)	Speed (rpm)	Rated Current (A)	Rated Power (W)	Max. Air Flow (m³/h)	Max Pressure (Pa)	Noise (dB(A))
HEC1238HA	115/230	85-265	3000	0.16	5.8	196	88	45
HEC1238MA	115/230	85-265	2600	0.1	4.5	166	61	39
HEC1238LA	115/230	85-265	1700	0.06	2	99	26	25