




## 3-CONDUCTOR THROUGH TERMINAL BLOCK SUITABLE FOR EX E APPLICATIONS CENTRE-/ LATERAL MARKING

© 1992 - 2011 CADENAS GmbH



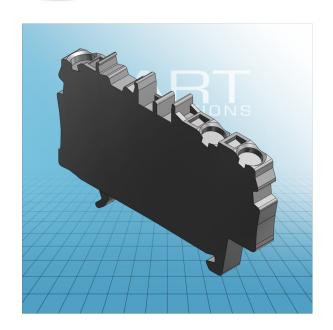

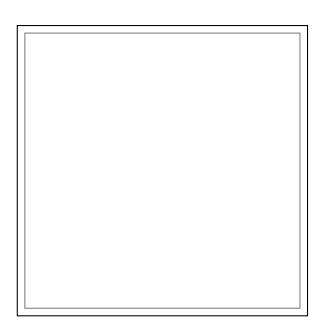

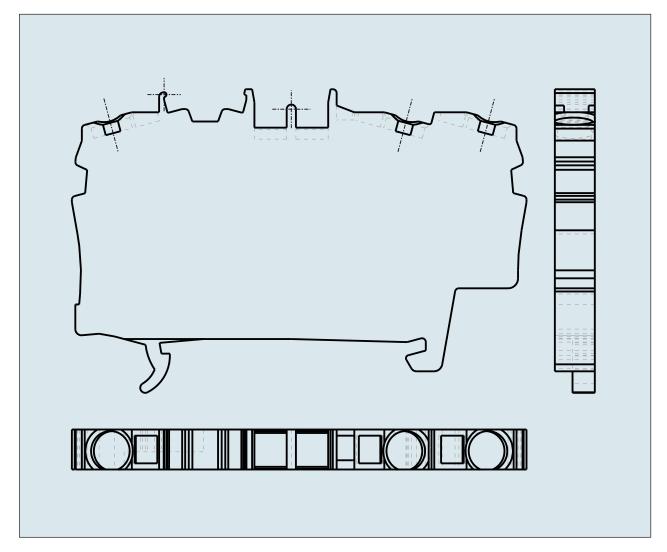



## 3-CONDUCTOR THROUGH TERMINAL BLOCK SUITABLE FOR EX E APPLICATIONS CENTRE-/ LATERAL MARKING

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

2002-1301

| ITEM-NO. (ITEM-NO.)                                  | 2002-1301      |
|------------------------------------------------------|----------------|
| Cross section1 (Cross section / mm²)                 | 0.25 - 2.5 (4) |
| Cross section2 (Cross section / AWG)                 | 22 - 12        |
| Strip length (Strip length / mm)                     | 10 - 12        |
| Measured voltage (Measured voltage / V)              | 800            |
| Measured shock voltage (Measured shock voltage / kV) | 8              |
| Pollution degree (Pollution degree)                  | 3              |
| Current intensity (Current intensity / A)            | 24             |
| Height (Height / mm)                                 | 33             |
| Width (Width / mm)                                   | 5.2            |
| Depth (Depth / mm)                                   | 59.5           |
| No. of connection Points (No. of connection Points)  | 3              |
| No. of potentials (No. of potentials)                | 1              |
| COLOR (COLOR)                                        | grau           |
| WEIGHT (WEIGHT / g)                                  | 5.368          |