

# PC 1919 18 G



Sample image

**Order symbol :** PC 1919 18 G

**Product nr :** 5330369

UL Name : UL PC 1919 18 G

**Description :** Enclosure, PC


**Remarks :** Grey cover

**EAN :** 6418074005427

**El. number :**

- Finland : 3423703
- Denmark : 8212051522
- Sweden : 2539408

**Including :** Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

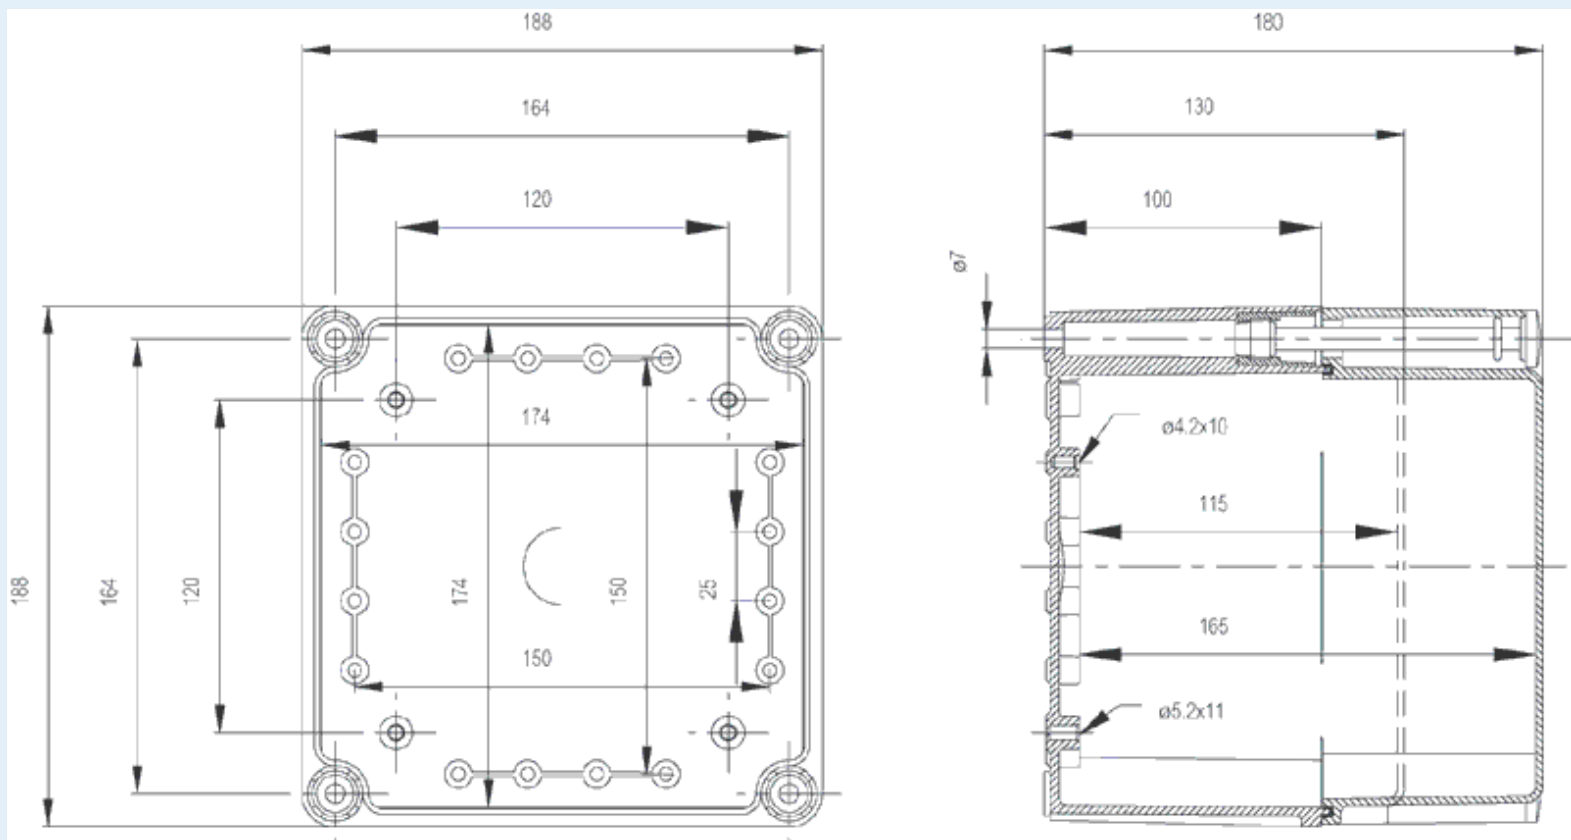

**Dimensions :**      **Height**      **Width**      **Depth**

mm :                      190                      190                      180

**Materials :**

**Accessories :**

EKHVT      Mounting plate, for enclosures:  
(148 x 148 x 1)

EKV 12      DIN-35 Mounting rail, for enclosures:  
(160 x 35 x 7)

Material : Polycarbonate  
Base colour : RAL\_7035  
Cover colour : RAL 7035 -light grey  
Gasket material : Polyurethane

MPI EKH 1919 Multiperforated plastic mounting plate  
(167 x 167 x 4)

**Temperatures :**

Temperature °C (short term) : -40 ... 120  
Temperature °C (continuous) : -40 ... 80  
Temperature °F (short term) : -40 ... 250  
Temperature °F (continuous) : -40 ... 175

**Ratings :**

Ingress protection (EN 60529): IP66; IP67;  
Impact Resistance (EN 62262): IK08;  
electrical\_insulation : Totally insulated  
Halogen free (DIN/VDE 0472, Part 815) : Yes  
UV resistance : UL 746C  
Flammability Rating : UL 94 V0  
Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

DSS\_FI\_41597\_A1