



### Main

Range of product	Modicon M221
Product or component type	Logic controller
[Us] rated supply voltage	100...240 V AC
Discrete input number	9 discrete input conforming to IEC 61131-2 Type 1
Analogue input number	2 at input range: 0...10 V
Discrete output type	Relay normally open
Discrete output number	7 relay
Discrete output voltage	5...125 V DC 5...250 V AC
Discrete output current	2 A

### Complementary

Discrete I/O number	16
Number of I/O expansion module	<= 4 for transistor output <= 4 for relay output
Supply voltage limits	85...264 V
Network frequency	50/60 Hz
Inrush current	<= 40 A
Power consumption in VA	<= 49 VA at 100...240 V with max number of I/O expansion module <= 33 VA at 100...240 V without I/O expansion module
Power supply output current	0.325 A at 5 V for expansion bus 0.12 A at 24 V for expansion bus
Discrete input logic	Sink or source (positive/negative)
Discrete input voltage	24 V
Discrete input voltage type	DC
Analogue input resolution	10 bits
LSB value	10 mV
Conversion time	1 ms per channel + 1 controller cycle time for analog input
Permitted overload on inputs	+/- 30 V DC for analog input with 5 min maximum +/- 13 V DC for analog input permanent
Voltage state 1 guaranteed	>= 15 V for input
Current state 1 guaranteed	>= 2.6 mA for fast input >= 4.2 mA for discrete input
Voltage state 0 guaranteed	<= 5 V for input
Current state 0 guaranteed	<= 1.3 mA for discrete input <= 0.6 mA for fast input
Discrete input current	7 mA for discrete input 5 mA for fast input
Input impedance	4.9 kOhm for fast input 3.4 kOhm for discrete input 100 kOhm for analog input
Response time	10 ms turn-on operation for output 35 µs turn-off operation for input; I2...I5 terminal 35 µs turn-off operation for input; I2...I5 terminal 10 ms turn-off operation for output 5 µs turn-on operation for fast input; I0, I1, I6, I7 terminal 35 µs turn-on operation for input; other terminals terminal 5 µs turn-off operation for fast input; I0, I1, I6, I7 terminal 100 µs turn-off operation for input; other terminals terminal
Configurable filtering time	0 ms for input 12 ms for input 3 ms for input

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Output voltage limits	125 V DC 277 V AC
Current per output common	6 A at COM 1 terminal 6 A at COM 1 terminal 7 A at COM 0 terminal
Absolute accuracy error	+/- 1 % of full scale for analog input
Electrical durability	Inductive AC-15, (cos phi = 0.35) 240 V / 120 VA : 100000 cycles Resistive DC-12, 24 V / 48 W : 100000 cycles Resistive AC-12, 120 V / 240 VA : 100000 cycles Inductive AC-15, (cos phi = 0.35) 240 V / 36 VA : 300000 cycles Resistive AC-12, 120 V / 80 VA : 300000 cycles Inductive (L/R = 7 ms) DC-13, 24 V / 24 W : 100000 cycles Resistive DC-12, 24 V / 16 W : 300000 cycles Inductive (L/R = 7 ms) DC-13, 24 V / 7.2 W : 300000 cycles Inductive AC-14, (cos phi = 0.7) 240 V / 240 VA : 100000 cycles Inductive AC-15, (cos phi = 0.35) 120 V / 60 VA : 100000 cycles Inductive AC-14, (cos phi = 0.7) 240 V / 72 VA : 300000 cycles Inductive AC-15, (cos phi = 0.35) 120 V / 18 VA : 300000 cycles Resistive AC-12, 240 V / 480 VA : 100000 cycles Inductive AC-14, (cos phi = 0.7) 120 V / 120 VA : 100000 cycles Resistive AC-12, 240 V / 160 VA : 300000 cycles Inductive AC-14, (cos phi = 0.7) 120 V / 36 VA : 300000 cycles
Switching frequency	20 switching operations/minute with maximum load
Mechanical durability	>= 20000000 cycles for relay output
Minimum load	1 mA at 5 V DC for relay output
Protection type	Without protection at 5 A
Reset time	1 s
Memory capacity	256 kB for user application and data RAM with 10000 instructions 256 kB for internal variables RAM
Data backed up	256 kB built-in flash memory for backup of application and data
Data storage equipment	2 GB SD card optional
Battery type	BR2032 lithium non-rechargeable, battery life: 4 yr
Backup time	1 year at 25 °C by interruption of power supply
Execution time for 1 KInstruction	0.3 ms for event and periodic task
Execution time per instruction	0.2 µs Boolean
Exct time for event task	60 µs response time
Maximum size of object areas	512 %M memory bits 8000 %MW memory words 512 %KW constant words 255 %TM timers 255 %C counters
Realtime clock	With
Clock drift	<= 30 s/month at 25 °C
Regulation loop	Adjustable PID regulator up to 14 simultaneous loops
Counting input number	4 fast input (HSC mode) (counting frequency: 100 kHz), counting capacity: 32 bits
Control signal type	A/B Pulse/direction Single phase
Integrated connection type	USB port with connector mini B USB 2.0 Ethernet with connector RJ45 Non isolated serial link "serial 1" with connector RJ45 and interface RS232/RS485
Supply	Serial serial link supply at 5 V 200 mA
Transmission rate	1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m - communication protocol: RS485 1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m - communication protocol: RS232 480 Mbit/s - communication protocol: USB
Communication port protocol	USB port : USB protocol - SoMachine-Network Non isolated serial link : Modbus protocol master/slave - RTU/ASCII or SoMachine-Network : Ethernet protocol
Port Ethernet	10BASE-T/100BASE-TX 1 port with 100 m copper cable
Communication service	DHCP client Ethernet/IP adapter Modbus TCP server Modbus TCP client Modbus TCP slave device

Local signalling	<p>1 LED red for module error (ERR)  1 LED green for PWR  1 LED green for RUN  1 LED green for SD card access (SD)  1 LED red for BAT  1 LED per channel green for I/O state  1 LED green for SL  Ethernet network activity green for ACT  Ethernet network link yellow for Link (Link Status)</p>
Electrical connection	<p>Mini B USB 2.0 connector for a programming terminal  Terminal block, 3 terminal(s) for connecting the 24 V DC power supply  Connector, 4 terminal(s) for analogue inputs  Removable screw terminal block for inputs  Removable screw terminal block for outputs</p>
Cable length	<p>&lt;= 10 m shielded cable for fast input  &lt;= 10 m shielded cable for fast input  &lt;= 30 m unshielded cable for output  &lt;= 30 m unshielded cable for digital input  &lt;= 1 m unshielded cable for analog input</p>
Insulation	<p>2300 V AC between output and internal logic  Non-insulated between analogue inputs  500 V AC between input and internal logic  Non-insulated between analogue input and internal logic  1500 V AC between supply and ground  500 V AC between sensor power supply and ground  500 V AC between input and ground  1500 V AC between output and ground  2300 V AC between supply and internal logic  500 V AC between sensor power supply and internal logic  500 V AC between Ethernet terminal and internal logic  2300 V AC between supply and sensor power supply</p>
Marking	CE
Sensor power supply	DC at 250 mA supplied by the controller
Mounting support	<p>Top hat type TH35-15 rail conforming to IEC 60715  Top hat type TH35-7.5 rail conforming to IEC 60715  Plate or panel with fixing kit</p>
Height	90 mm
Depth	70 mm
Width	95 mm
Product weight	0.346 kg

## Environment

standards	<p>EN/IEC 60664-1  EN/IEC 61131-2  EN/IEC 61010-2-201</p>
product certifications	<p>ABS  CSA  CULus  LR  IACS E10  RCM  EAC  DNV-GL</p>
environmental characteristic	Ordinary and hazardous location
resistance to electrostatic discharge	<p>4 kV on contact conforming to EN/IEC 61000-4-2  8 kV in air conforming to EN/IEC 61000-4-2</p>
resistance to electromagnetic fields	<p>10 V/m ( 80 MHz...1 GHz) conforming to EN/IEC 61000-4-3  3 V/m ( 1.4 GHz...2 GHz) conforming to EN/IEC 61000-4-3  1 V/m ( 2...2.7 GHz) conforming to EN/IEC 61000-4-3</p>
resistance to magnetic fields	30 A/m at 50...60 Hz conforming to EN/IEC 61000-4-8
resistance to fast transients	<p>2 kV for power lines conforming to EN/IEC 61000-4-4  2 kV for relay output conforming to EN/IEC 61000-4-4  1 kV for Ethernet line conforming to EN/IEC 61000-4-4  1 kV for serial link conforming to EN/IEC 61000-4-4  1 kV for I/O conforming to EN/IEC 61000-4-4</p>
surge withstand	<p>2 kV for power lines (AC) in common mode conforming to EN/IEC 61000-4-5  2 kV for power lines (AC) in common mode conforming to EN/IEC 61000-4-5  2 kV for relay output in common mode conforming to EN/IEC 61000-4-5  1 kV for I/O in common mode conforming to EN/IEC 61000-4-5  1 kV for shielded cable in common mode conforming to EN/IEC 61000-4-5</p>


0.5 kV for power lines (DC) in differential mode conforming to EN/IEC 61000-4-5  
 1 kV for power lines (AC) in differential mode conforming to EN/IEC 61000-4-5  
 1 kV for relay output in differential mode conforming to EN/IEC 61000-4-5  
 0.5 kV for power lines (DC) in common mode conforming to EN/IEC 61000-4-5

resistance to conducted disturbances, induced by radio frequency fields	10 Vrms (0.15...80 MHz) conforming to EN/IEC 61000-4-6 3 Vrms (0.1...80 MHz) conforming to Marine specification (LR, ABS, DNV, GL) 10 Vrms (spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz)) conforming to Marine specification (LR, ABS, DNV, GL)
electromagnetic emission	Conducted emissions conforming to EN/IEC 55011 power lines (AC), 0.15...0.5 MHz : 79 dB $\mu$ V/m QP/66 dB $\mu$ V/m AV Conducted emissions conforming to EN/IEC 55011 power lines (AC), 0.5...300 MHz : 73 dB $\mu$ V/m QP/60 dB $\mu$ V/m AV Conducted emissions conforming to EN/IEC 55011 power lines, 10...150 kHz : 120...69 dB $\mu$ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 150 kHz...1.5 MHz : 79...63 dB $\mu$ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 1.5...30 MHz : 63 dB $\mu$ V/m QP Radiated emissions conforming to EN/IEC 55011 class A 10 m, 30...230 MHz : 40 dB $\mu$ V/m QP Radiated emissions conforming to EN/IEC 55011 class A 10 m, 200 MHz...1 GHz : 47 dB $\mu$ V/m QP
immunity to microbreaks	10 ms
ambient air temperature for operation	-10...55 °C for horizontal installation -10...35 °C for vertical installation
ambient air temperature for storage	-25...70 °C
relative humidity	10...95 % without condensation in operation 10...95 % without condensation in storage
IP degree of protection	IP20 with protective cover in place
pollution degree	<= 2
operating altitude	0...2000 m
storage altitude	0...3000 m
vibration resistance	3.5 mm (vibration frequency: 5...8.4 Hz) on symmetrical rail 1 gn (vibration frequency: 8.4...150 Hz) on symmetrical rail 3.5 mm (vibration frequency: 5...8.4 Hz) on panel mounting 1 gn (vibration frequency: 8.4...150 Hz) on panel mounting
shock resistance	98 m/s <sup>2</sup> (test wave duration:11 ms)


## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1415 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available


## Dimensions

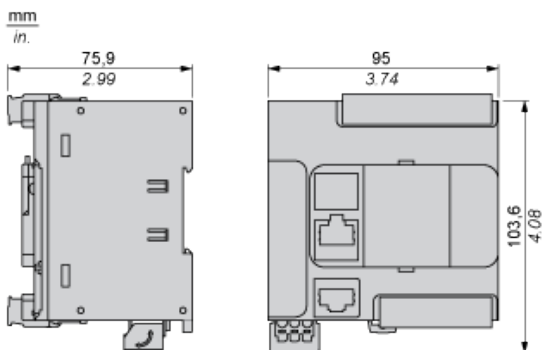

## Mounting on a Rail

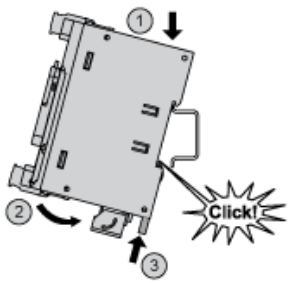


## Direct Mounting on a Panel Surface

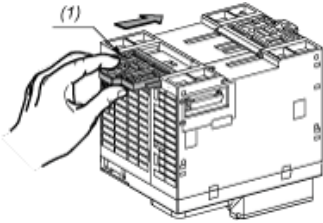


(1) Install a mounting strip

### Mounting Hole Layout

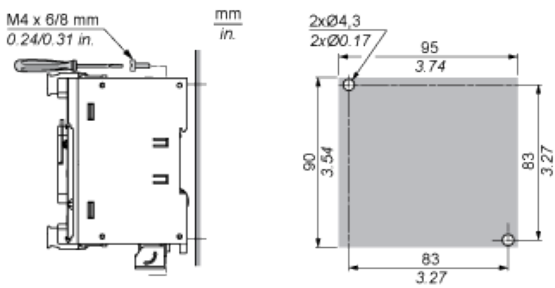


## Mounting


### Correct Mounting Position

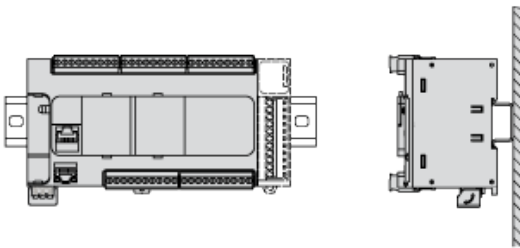

### Acceptable Mounting Position

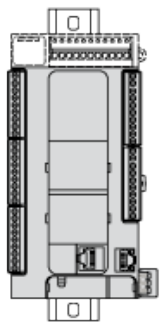


### Incorrect Mounting Position

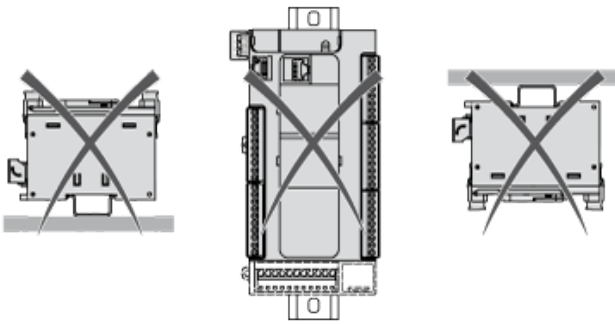


## Clearance

mm  
in.

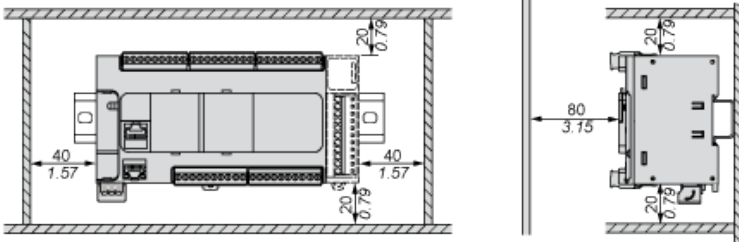


## Digital Inputs

### Wiring Diagram (Positive Logic)

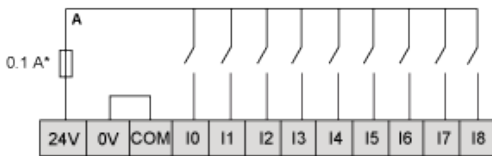


(\*) Type T fuse

### Wiring Diagram (Negative Logic)

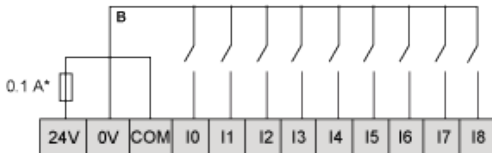

(\*) Type T fuse


### Connection of the Fast Inputs



10, 11, 16, 17


## Relay Outputs

### Negative Logic (Sink)

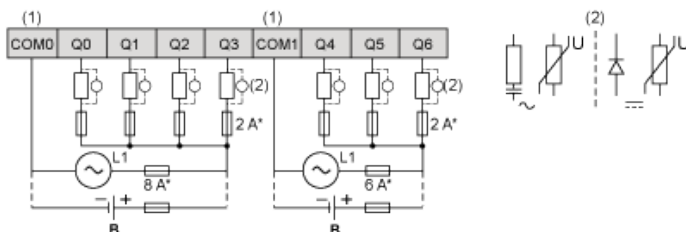


- (\*) Type T fuse
  - (1) The COM1 and COM2 terminals are not connected internally.
  - (2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load
- B Sink wiring (negative logic)**

**Positive Logic (Source)**

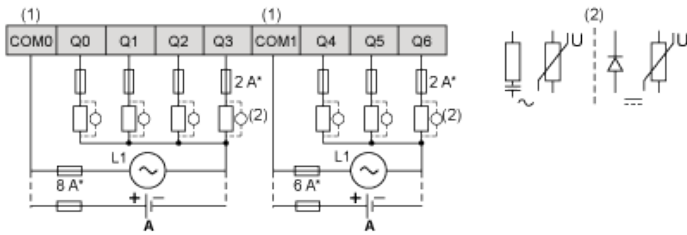

- (\*) Type T fuse
  - (1) The COM1 and COM2 terminals are not connected internally.
  - (2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load
- A Source wiring (positive logic)**


**Analog Inputs**

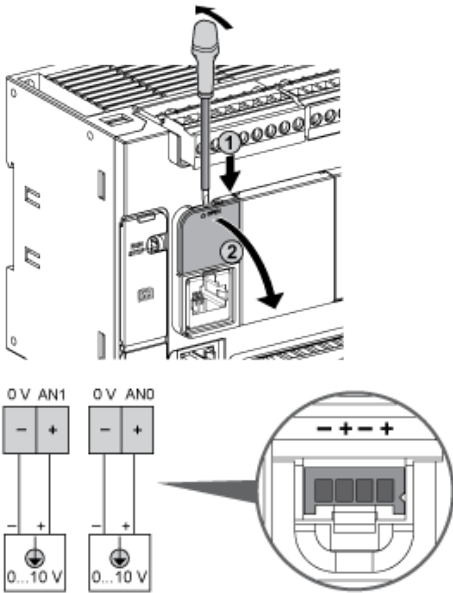

The (-) poles are connected internally.


Pin	Wire Color
0 V	Black
AN1	Red
0 V	Black
AN0	Red

**Ethernet Connection**




Pin N°	Signal
1	TD+


2	TD-
3	RD+
4	-
5	-
6	RD-
7	-
8	-

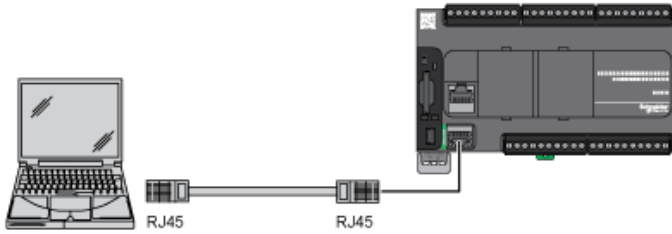

### USB Mini-B Connection

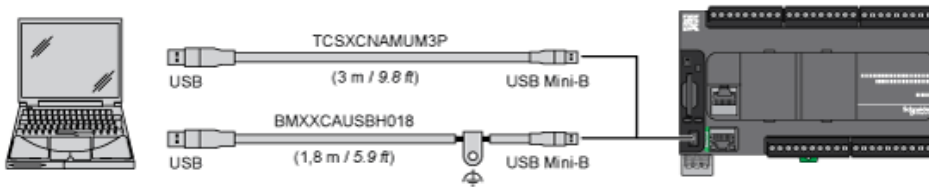

### SL1 Connection




SL1

N °	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1
5	N.C.	D0
6	CTS	N.C.
7	N.C.*	5 Vdc
8	Common	Common

N.C.: not connected


\* : 5 Vdc delivered by the controller. Do not connect.



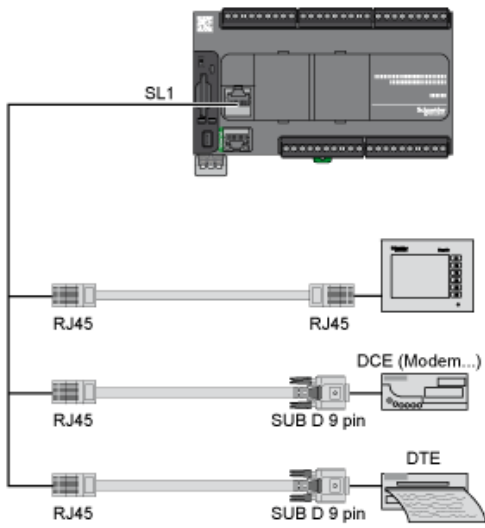

## Derating Curves


### Embedded Digital Inputs (No Cartridge)

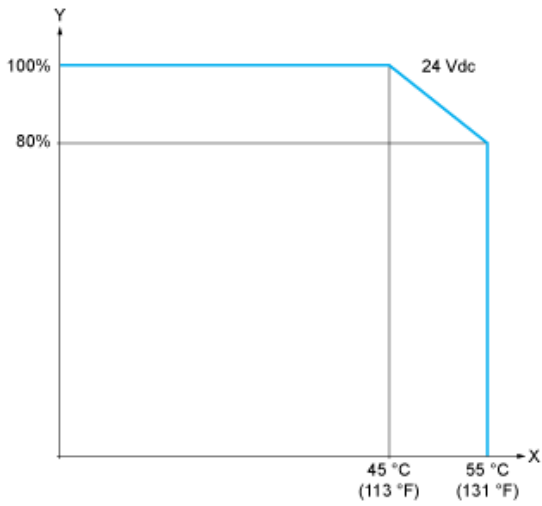

X : Ambient temperature

Y : Input simultaneous ON ratio

### Embedded Digital Inputs (with Cartridge)

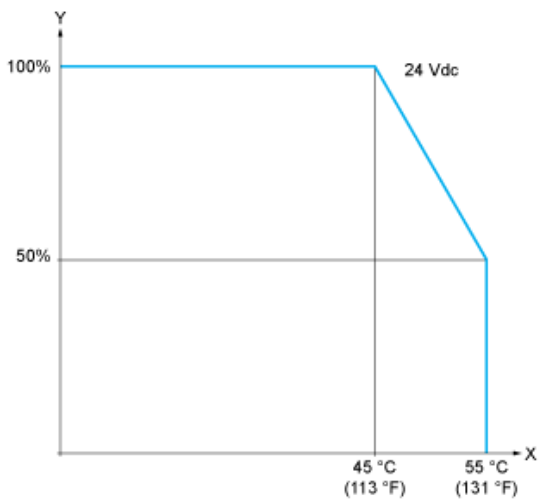

X : Ambient temperature

Y : Input simultaneous ON ratio