

Technical Data Sheet:	DS066/0512
Product Description	FPAS Contractor Pack: 10 metres of standard weight flexible nylon Conduit with 10x nylon FPA fittings and locknuts
Product Range	FPAS - Flexible Conduit Contractor Pack

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham
B46 1HG
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com




Size	Part No.
20mm	FPAS-CP21B
25mm	FPAS-CP25B

FPAS Contractor Pack

- 10 Metres of FPAS standard weight flexible nylon conduit
- 10 FPA nylon fittings
- 10 Nylon locknuts



FPAS Conduit with FPA Fitting

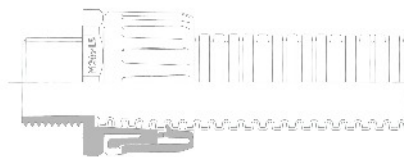

Material:
Conduit: Nylon PA6 (flame retardant)
Fittings: Nylon PA66

Colour: Black

Fire Performance:
Conduit:
•Low fire hazard
•Halogen Free
•Self extinguishing
•Low smoke and low toxicity
•Flame Retardant

IP Rating:
• IP66 with FPA fittings

Applications:
•UV Resistant
•Fast Fit fittings
•Anti vibration & Tamper Resistant
•High tensile strength due to all round retaining teeth
•Supplied complete with glass reinforced nylon locknuts.
•Fitting can be removed using a screwdriver
• Oil and Solvent resistant

Temperature Performance:
Static: -40°C to +120°C




Conduit

Size	OD (mm)	ID (mm)	Min Bend radius R (mm)	Compression Strength kg/100mm
20	20	14.8	45	80
25	25.0	19.1	50	80



Fitting

Size	Metric Thread	Dimension (mm)					
	A	B	C	D	E	F (A/F)	
20	M20 X 1.5	14	30	32	14.5	30	
25	M25 X 1.5	15	34	39	19.5	37	

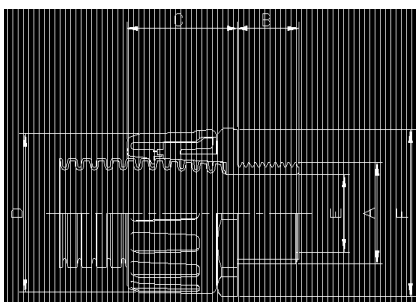

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

Typical Applications;



Machinery and OEM's



Construction

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------