


# Product datasheet

Specifications

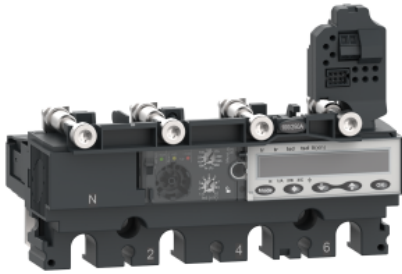

trip unit MicroLogic 5.2 E for  
ComPacT NSX 160/250 circuit  
breakers, electronic, rating 160A, 4  
poles 4d

C1645E160

## Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Control unit
Trip unit name	Micrologic 5.2 E
Trip unit technology	Electronic
Range compatibility	ComPacT new generation NSX160 ComPacT new generation NSX250
Device application	Distribution
Poles description	4P
Protected poles description	4t 3t + OSN 3t + N/2 3t
Neutral position	Left
Trip unit protection functions	LSI
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection
Trip unit rating	160 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

## Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	63...160 A
Long-time protection delay adjustment type tr	Adjustable
[Tr] long-time protection delay adjustment range	15...400 s at 1.5 x Ir 0.35...11 s at 7.2 x Ir 0.5...16 s at 6 x Ir
Thermal memory	20 minutes before and after tripping

Short-time protection pick-up adjustment type Isd	Adjustable 9 settings
[Isd] Short-time protection pick-up adjustment range	1.5...10 x Ir
Short-time protection delay adjustment type tsd	Adjustable
[Tsd] Short-time protection delay adjustment range	0...0.4 s I <sup>2</sup> t=off 0.1...0.4 s I <sup>2</sup> t=on
Instantaneous protection pick-up adjustment type li	Adjustable
[li] instantaneous protection pick-up adjustment range	1.5...15 x In
Earth-leakage protection	Without
Neutral protection settings	0.5 x Ir (3t + N/2) 1 x Ir (4t) 1.6 x Ir (3t + OSN) No protection (3t)
Zone selective interlocking ZSI	With
Local signalling	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload
Display type	LCD display
Type of measurement	Energy meter
Communication of data	Instantaneous and demand values Protection and alarm settings Demand current and power Power quality Energy metering Maintenance indicators Maximeters/minimeters Time-stamped histories and event tables
Electrical data recording	Maintenance indicators

## Environment

Standards	UL 508 EN/IEC 60947-2
Product certifications	CCC EAC Marine
Pollution degree	3 conforming to IEC 60947-1
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	660.0 g
Package 1 Height	9.5 cm
Package 1 width	11 cm
Package 1 Length	15 cm
Unit Type of Package 2	S03
Number of Units in Package 2	11
Package 2 Weight	7.7 kg

---

Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

---

## Offer Sustainability

---

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information

---

## Contractual warranty

---

Warranty	18 months
----------	-----------

---