

CAB ABS 354516 G



Sample image

Order symbol: CAB ABS 354516 G

Product nbr: 8183356

Description: Opaque door

Remarks: Latches on the short side


Including: Cabinet base, door with PUR gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

EAN: 6418074049162

El. number:

- Finland:
- Denmark:
- Sweden:

CAB 450x350x160

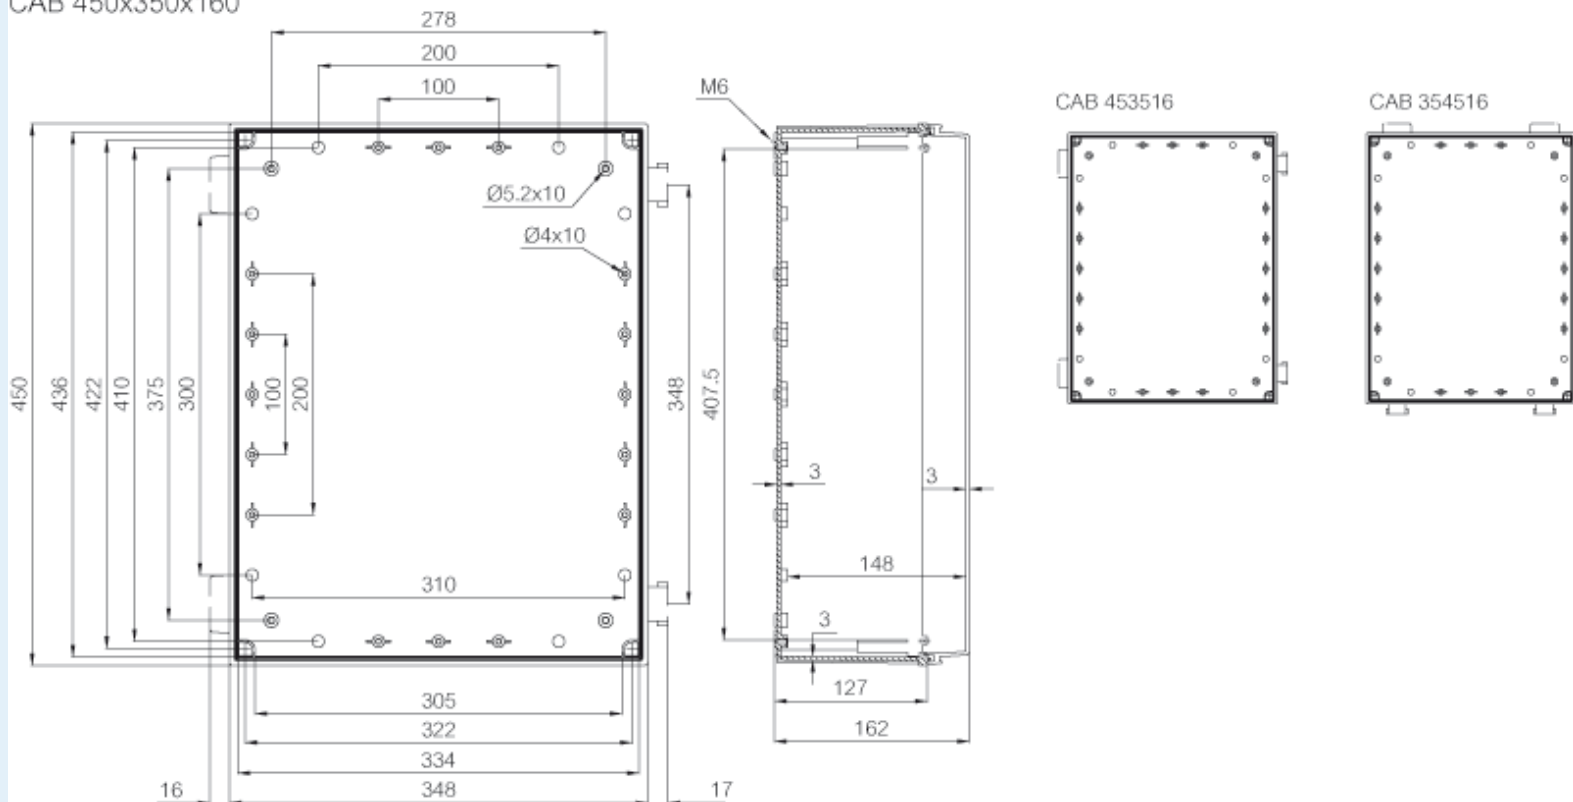

Dimensions:	Height	Width	Depth
mm:	350	450	160

Rating:	
Ingress protection (EN 60529):	IP65;

inch:	13.78	17.72	6.3
-------	-------	-------	-----

Materials:

Material:	ABS
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

Temperatures:

Temperature °C (short term)::	-40 ... 80
Temperature °C (continuous):	-40 ... 60
Temperature °F (short term):	-40 ... 175
Temperature °F (continuous):	-40 ... 140

Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	-
Flammability Rating:	UL 94 HB
Glow Wire Test (IEC 695-2-1) °C:	650 °C
NEMA Class	

Certificates:

Certificate FI 40854