


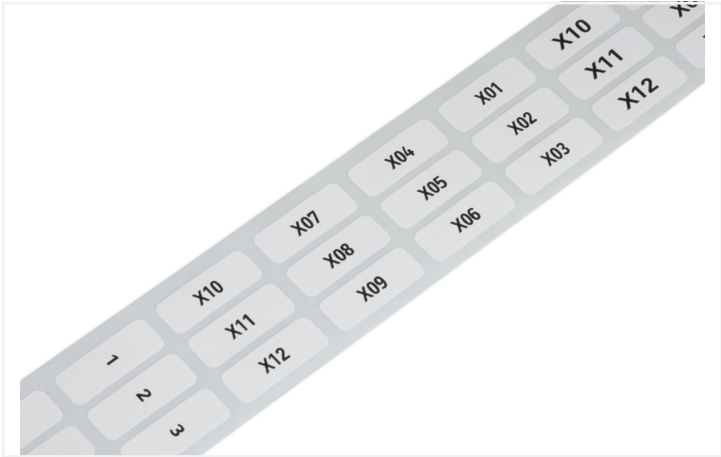

Color: white

Technical data	
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	1,500 labels/reel; 2 lines
Printing device	Smart Printer (thermal transfer printer)

Physical data	
Depth	0.1 mm
Marking surface	9.5 x 25 mm

Mechanical data	
Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material data	
Color	white
Material	Polyester
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylate
Halogen-free	Yes
Weight	82.7 g
Fire load	0 MJ



Environmental requirements		
Ambient temperature (storage)		+10 ... +21 °C
Ambient temperature (operation)		-40 ... +150 °C
Relative humidity		40 ... 50 %

Commercial data		
Product Group		2 (Terminal Block Accessories)
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821632665
Customs tariff number		39199080888

Product classification		
UNSPSC		14111537
eCl@ss 10.0		27-40-06-29
eCl@ss 9.0		27-40-06-29
ETIM 9.0		EC001288
ETIM 8.0		EC001288
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 210-808		

Documentation			
Operating Instructions			
210-805 Information on handling print material	1 28.08.2020	pdf 1338.18 KB	



1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Protective marker cover



Item No.: 209-114
Protection cover; transparent