


Data Sheet | Item Number: 216-206

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue

<https://www.wago.com/216-206>



Color: ■ blue

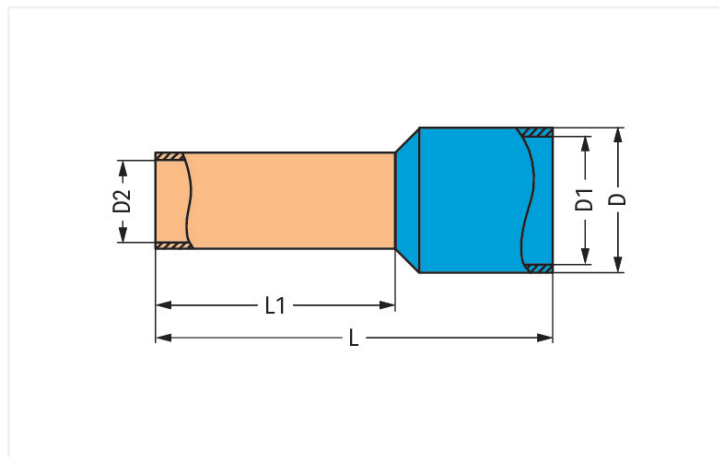

Dimensions in mm

Connection data

Cross-section metric	2.5 mm ²
Strip length	10 ... 11 mm / 0.39 ... 0.43 inches
Cross-section AWG	14 AWG

Physical data

Wall thickness plastic collar	0.25 mm
Total length	15 mm
Wall thickness crimp sleeve	0.15 mm
Crimp length (length of sleeve)	8 mm
Inner Diameter plastic collar	4.2 mm
Diameter crimp sleeve inside	2.2 mm

Mechanical data

Plastic collar	Standard collar
----------------	-----------------

Material data

Color	blue
Fire load	0.002 MJ
Weight	0.2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332277518
Customs tariff number	85369010000



Product classification	
UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 8.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-206


↓

Documentation			
Bid Text			
216-206	19.02.2019	xml 2.80 KB	↓
216-206	11.09.2017	doc 24.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable



Using a 12 AWG conductor with ferrule (Item No. 216-206).

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com