
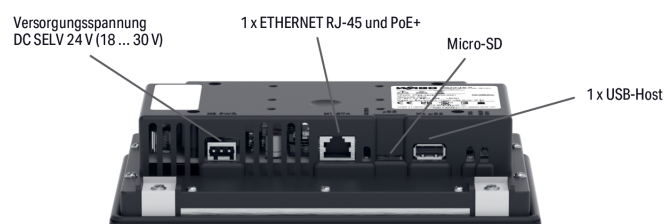


Data Sheet | Item Number: 762-3403

Web Panel 400; 17.8 cm (7.0"); 1024 x 600 pixels; Web Panel

<https://www.wago.com/762-3403>

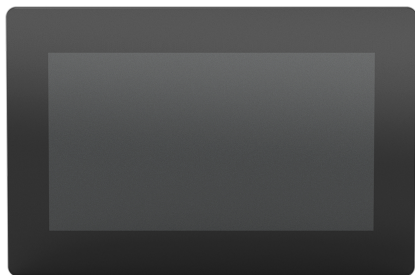

PIO1 hardware configuration

- 1 x ETHERNET port for connecting to field devices and the engineering tool
- 1 x USB interface for optional connection of a USB stick, mouse or keyboard



Technical data		
Display diagonal		17.8 cm (7 inches)
Display		Capacitive touchscreen
Display colors		16 million colors
Graphics resolution		(1024 x 600) px
Contrast ratio		800:1
Viewing angle (horizontal/vertical)		80° / 80°
Brightness		720 cd/m²
Visualization		Web server
ETHERNET protocols		DHCP DNS FTP FTPS HTTP HTTPS SSH
Communications		Web browser (HTML5)
Operating system		Real-time Linux (with PREEMPT_RT patch)
Processor		ARM Cortex-A53 Quad-Core 4 x 1.6 GHz
Main memory (RAM)		2048 MB
Internal memory (flash)		4096 MB
Type of memory card		microSD (max. 2 GB); microSDHC (max. 32 GB)
Indicators		Two-color LED (red, green)
Control Elements		Capacitive touchscreen
Supply voltage		24 VDC, SELV (18 ... 31.2 V); with reverse voltage protection or Power over Ethernet (PoE, class 3) via ETHERNET RJ-45 connection
Operating power		5,3 W, without USB load; 8 W, with USB load

Connection data		
Connection technology: communication/fieldbus		Web browser: 1 x RJ-45; 1 x USB 2.0 host (type A)
Connection technology: supply		1 x Included female connector (734-103/037-000) with three CAGE CLAMP® connections

Physical data		
Width		194.4 mm / 7.65 inches
Height		136.7 mm / 5.38 inches
Depth		38.7 mm / 1.52 inches
Panel cutout (W x H)		(186 x 123) mm

Mechanical data		
Mounting type		Clamping elements (pre-assembled) or VESA mounting (50x50 mm), thermoplastic screws (included)

Material data		
Fire load		0 MJ
Weight		700 g



Environmental requirements	
Ambient temperature (operation)	-20 ... +55 °C
Ambient temperature (storage)	-20 ... +70 °C
Protection type	IP65
Note on protection type	IP65 (front side); IP20 (rear side), per EN 60529
Relative humidity (without condensation)	90 %

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966607871
Customs tariff number	8471410000

Product classification	
UNSPSC	43211902
ETIM 9.0	EC001414
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 762-3403	



Documentation

Manual			
WAGO Web Panels 400	3831374091 1 en-US 2025-03-12 07:40 13.03.2025	pdf 6280.76 KB	